Inserting your SIM Card

Step 1: Disassemble the enclosure by loosing the four screws at the bottom.

Step 2: Carefully remove the bottom from the enclosure.

Step 3: Insert the SIM card as indicated by the icon. Then replace the bottom.

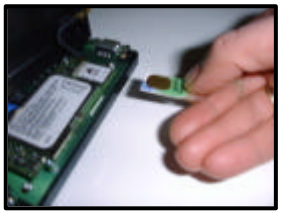

Step 4: Before re-assembling your modem decide if you want to use the straps enclosed in the box.

Step 4a: With straps: place the straps at the bottom of the enclosure, using the holes of the screws. Then fix the bottom by using the 4 most large screws

Step 4b: Re-assemble the enclosure normally, using the standard screws

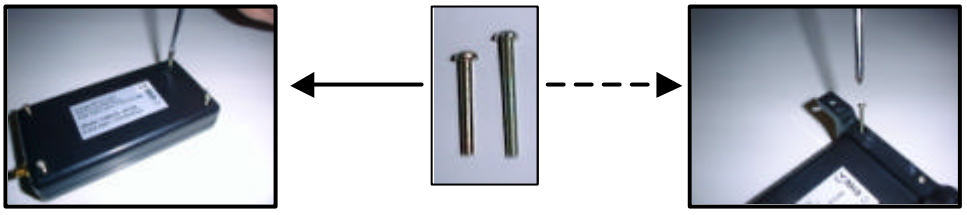

Note: in order to access most modem functions you should unlock the SIM by entering the PON Code. Any communication program (like MS-hyper terminal) can be used for this purpose.

AT	Response: OK
AT+CPIN=”xxxx”	Response: OK (xxxx = pin code)